

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- BLACK BORDERS**
- IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- FADED TEXT OR DRAWING**
- BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- SKEWED/SLANTED IMAGES**
- COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- GRAY SCALE DOCUMENTS**
- LINES OR MARKS ON ORIGINAL DOCUMENT**
- REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.



The Delphion
Integrated
View

Other Views:
[INPADOC](#)

Title: **JP11307081A2: LITHIUM ION SECONDARY BATTERY AND ITS MANUFACTURE**
 ► Want to see a more descriptive title highlighting what's new about this invention?

Country: JP Japan
 Kind: A2 Document Laid open to Public inspection

Inventor(s): MAEDA KENICHI

Applicant/Assignee: SHIN KOBE ELECTRIC MACH CO LTD
[Inquire Regarding Licensing](#)

Issued/Filed Dates: Nov. 5, 1999 / April 17, 1998

Application Number: JP1998000107775

IPC Class: H01M 4//02; H01M 4//04; H01M 4//62; H01M 10//40;
 ► Interested in classification by use rather than just by description?

Priority Number(s): April 17, 1998 JP19981998107775


Abstract: **Problem to be solved:** To suppress the deterioration of capacity and decrease the number of charge/discharge cycles of a battery by adding phosphoric ester as a surface active agent to at least one of a positive electrode material layer mainly comprising a lithium-containing composite oxide and a negative electrode material layer mainly comprising a carbon material.

Solution: Phosphoric ester acting as a surface active agent is added to at least one of a positive electrode material layer and a negative electrode material layer of a lithium ion secondary battery in which the positive electrode material layer mainly comprising a lithium-containing composite oxide (lithium cobaltate) and the negative electrode material layer mainly comprising a carbon material (graphite) absorbing/releasing lithium ions are stacked through a nonaqueous electrolyte layer. As the phosphoric ester, triphenyl phosphate or tricresyl phosphate is used and the adding amount is 2-20 wt.% based on the weight of the lithium-containing composite oxide or the carbon material. The phosphoric ester is eluted on the electrode surface, forms the unevenness on the electrode surface, and sufficiently heightens the wettability on the electrode surface.

COPYRIGHT: (C)1999,JPO

► See a clear and precise summary of the whole patent, in understandable terms.

Family: [Show known family members](#)



BEST AVAILABLE COPY



Other Abstract Info: none


Foreign References: No patents reference this one



[Nominate this
for the Gallery...](#)

[Subscribe](#) | [Privacy Policy](#) | [Terms & Conditions](#) | [FAQ](#) | [Site Map](#) | [Help](#) | [Contact Us](#)

© 1997 - 2002 Delphion Inc.



(19)

(11) Publication number:

11307081 A

Generated Document.

PATENT ABSTRACTS OF JAPAN

(21) Application number: 10107775

(51) Int'l. Cl.: H01M 4/02 H01M 4/04 H01M 4/62 H01M 10/40

(22) Application date: 17.04.98

(30) Priority:

(43) Date of application
publication: 05.11.99(84) Designated contracting
states:

(71) Applicant: SHIN KOBE ELECTRIC MACH CO LTD

(72) Inventor: MAEDA KENICHI

(74) Representative:

(54) LITHIUM ION SECONDARY BATTERY AND ITS MANUFACTURE

(57) Abstract:

PROBLEM TO BE SOLVED: To suppress the deterioration of capacity and decrease the number of charge/discharge cycles of a battery by adding phosphoric ester as a surface active agent to at least one of a positive electrode material layer mainly comprising a lithium-containing composite oxide and a negative electrode material layer mainly comprising a carbon material.

SOLUTION: Phosphoric ester acting as a surface active agent is added to at least one of a positive electrode material layer and a negative electrode material layer of a lithium ion secondary battery in which the positive electrode material layer mainly comprising a lithium-containing composite oxide (lithium cobaltate) and the negative electrode material layer mainly comprising a carbon material (graphite) absorbing/releasing lithium ions are stacked through a nonaqueous electrolyte layer. As the

phosphoric ester, triphenyl phosphate or tricresyl phosphate is used and the adding amount is 2-20 wt.% based on the weight of the lithium-containing composite oxide or the carbon material. The phosphoric ester is eluted on the electrode surface, forms the unevenness on the electrode surface, and sufficiently heightens the wettability on the electrode surface.

COPYRIGHT: (C)1999,JPO

OUR COMPETITION JUST FILED
a patent application

Delphion

Log Out Order Form Work Files View Cart

ABOUT DELPHION PRODUCTS NEWS & EVENTS MY ACCOUNT IP SEARCH

Browse Codes IP Listings Prior Art Derwent Advanced Boolean Quick/Number

Derwent information adds clarity and brings out the real meaning of each patent or application – letting you complete your research more quickly with better results.
Derwent Records like this one are available FREE for a limited time.

[More Information ▶](#)

Electrode coating for lithium ion secondary cell for portable electronic devices - has anode made of lithium oxide with carbon coated cathode which are coated with phosphate surfactant

Assignee: SHIN KOBE ELECTRIC MACHINERY Standard company (KOBE...)
Inventor(s): none

Accession / Update: 2000-119144 / 200017

IPC Class: H01M 4/02 ; H01M 4/04 ; H01M 4/62 ; H01M 10/40 ;

Derwent Classes: L03; X16;

Manual Codes: L03-E01B3(Graphite electrodes) , L03-E01B5(Alkali metal electrodes and unspecified electrodes for alkaline cells) , X16-B01F1(Lithium-based) , X16-E01C1(Oxides, complex oxides) , X16-E09(Other electrode aspects)

Derwent Abstract

**DERWENT
RECORD**

[Set Up Derwent Access Now](#)

(JP11307081A) **Novelty** - Anode (3) made of lithium containing multiple oxide and carbon content cathode (4) are provided in non-aqueous electrolyte. Both anode and cathode are covered with 2-20 weight percent of triphenyl phosphate surfactant.


Detailed Description - An INDEPENDENT CLAIM is also included for manufacturing method of lithium ion secondary battery.

Use - For lithium ion secondary battery used in portable electronic devices.

Advantage - Suppresses capacitive reduction of battery and durability by maintaining wetting state of electrolyte suitably using surfactant.

Abstract info: [JP11307081A: Dwg.1/2](#)

Images:

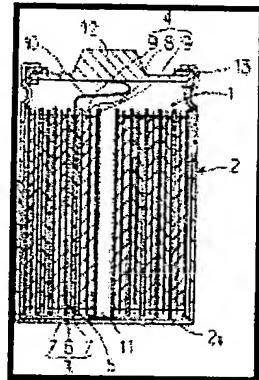

Description of Drawing - The figure shows the end elevation of lithium ion secondary battery. (3) Anode; (4) Cathode.

Family: **Patent** **Issued** **DW Update** **Pages** **Language** **IPC Class**
JP11307081A * Nov. 05, 1999 200011 5 English H01M 4/02
Local appls.: JP1998000107775 ApplDate:1998-04-17 (98JP-0107775)

Priority Number(s):

Application Number	Application Date	Original Title
JP1998000107775	April 17, 1998	LITHIUM ION SECONDARY BATTERY AND ITS MANUFACTURE

Title Terms: ELECTRODE COATING LITHIUM ION SECONDARY CELL PORTABLE ELECTRONIC DEVICE ANODE MADE LITHIUM OXIDE CARBON COATING CATHODE COATING PHOSPHATE SURFACTANT

 [Pricing](#)  [Current charges](#)

Data copyright Derwent 2002

Derwent
Searches

 [Patent /
Numbers](#)



[Boolean Text](#)



[Advanced Text](#)



[Demo](#)

